


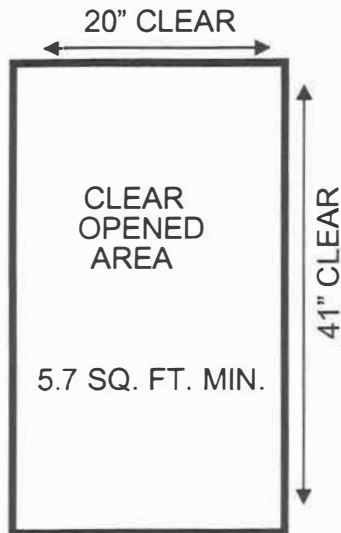


MINIMUM SIZE CLEAR
OPENING FOR 20" CLEAR
OPENED WIDTH

**MINIMUM CLEAR OPENING
REQUIREMENTS**

24" MINIMUM CLEAR HEIGHT
20" MINIMUM CLEAR WIDTH
5.7 SQ MINIMUM OPENED AREA

SILL HEIGHT


MAXIMUM 44" ABOVE FLOOR

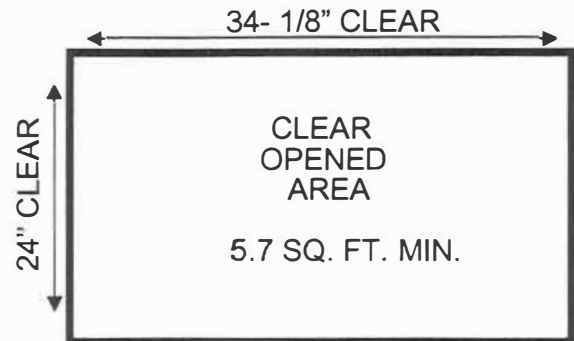

MINIMUM SIZE CLEAR OPENING
FOR 24" CLEAR OPENED HEIGHT


THE FOLLOWING WINDOW SIZES WILL BE THE MINIMUM ALLOWED FOR EGRESS
UNLESS MANUFACTURER DATA IS SUPPLIED OR ACTUAL CONDITIONS CONFORM.

STANDARD 6'-8" HEADER HEIGHT

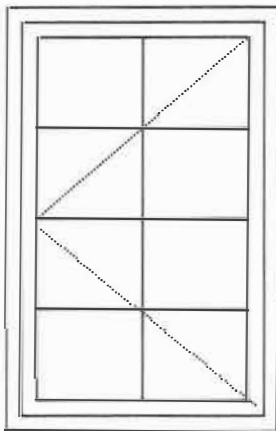


SINGLE CASEMENT:
2-4 X 4-0; 2-6 X 3-6
DOUBLE CASEMENT:
4-8 X 4-0
CASEMENT FIXED COMBO:
7-0 X 4-0
OTHER WINDOW TYPES
AWNING – "GREENHOUSE."
NONE W/O MANF. DATA

BAY W/FIXED CENTER
NONE W/O MANF. DATA

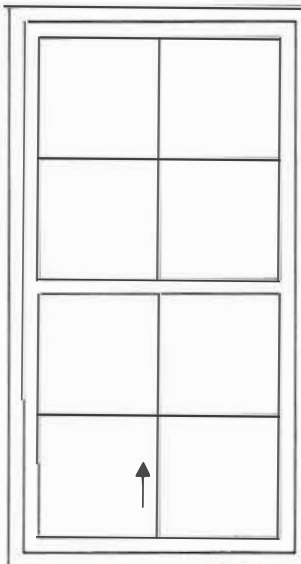

SINGLE/DOUBLE HUNG:
3-0 X 5-0
3-0 X 5-6
3-4 X 5-0
3-8 X 5-0
4-0 X 5-0

SINGLE/FIXED COMBO:
NONE W/O MANF. DATA

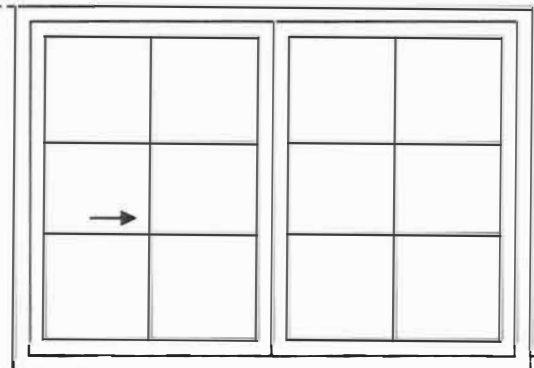

SLIDER
4-0 X 4-0
5-0 X 3-6
6-0 X 3-0

SLIDER
8-0 X 4-0
10-0 X 4-0
12-0 X 3-0

NOTE: SIZES ARE TAKEN FROM DATA SUPPLIED BY
WINDOW MANUFACTURERS. HOWEVER, THESE
ARE GENERAL DIMENSIONS. IT IS THE OWNERS
RESPONSIBILITY TO VERIFY THAT THE ACTUAL
WINDOWS INSTALLED MEET THE MINIMUM EGRESS
REQUIREMENTS.

44" MAXIMUM

44" MAXIMUM SILL HT.

FLOOR

EMERGENCY ESCAPE/EXIT WINDOW (CRC-R310)